

Footpath Construction — Miller Street Footpath (Herbert Street to Pulgul Street)

PROJECT:

This project provides for the construction of a 1.3m wide concrete footpath along the southern side of Miller Street between Herbert Street and Pulgul Street.

This project was identified for completion as part of Council's Walk and Cycle Strategy .

PROJECT ESTIMATE:

\$105,000 (this project is partly funded through the State Government's Transport Infrastructure Development Scheme)

PROJECT SCOPE OF WORKS:

The Project scope is as follows:

- Excavation and earthworks;
- Concrete footpath works;
- Replacement of existing footpath kerb ramps;
- Concrete driveways x 5;
- Tree planting x 8, tree trimming and removal of 1 tree;
- Topdressing and turfing of disturbed areas



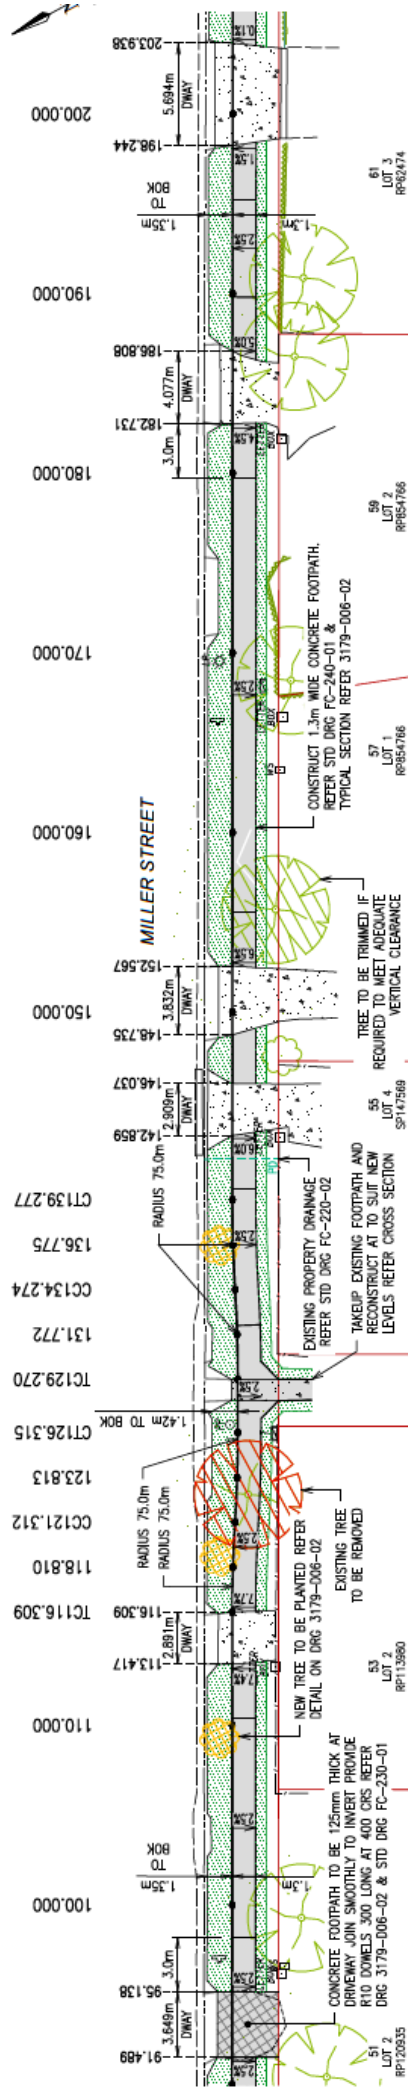
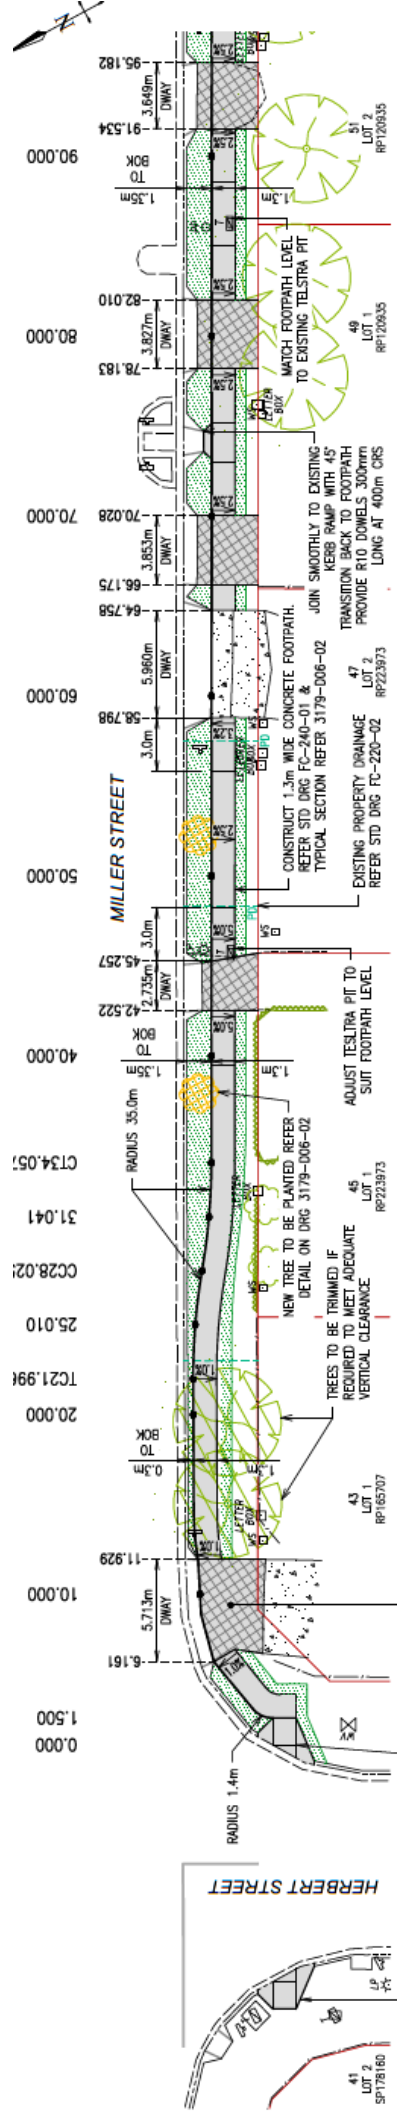
The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.




INDICATIVE PROJECT MILESTONES

INDICATIVE PROJECT MILESTONES	
June 2020	Final Design
July/Sept 2020	Construction Period
Oct 2020	Project Completion

Note: Project milestones are subject to weather and may change.

Footpath Construction —Miller Street Footpath (Herbert Street to Pulgul Street)



<u>TREE LEGEND</u>	
NEW TREE TO BE PLANTED TUCKEROO (CUPANIOPSIS ANACARDIODES)	
EXISTING TREE TO BE TRIMMED	
EXISTING TREE TO BE REMOVED	

Footpath Construction —Miller Street Footpath (Herbert Street to Pulgul Street)

