

Nahrung Road, North Aramara—Bridge Replacement

PROJECT:

This project provides for the replacement of an existing timber bridge on Nahrung Road, North Aramara approximately 245m north-west of the intersection with Musket Flat Road.

The bridge replacement works are being undertaken as the result of a bridge inspection program that identified that the existing bridge required replacement as it had reached the end of its useful life.


PROJECT ESTIMATE:

\$250,000

PROJECT SCOPE OF WORKS

The Project scope is as follows:

- Construction of temporary one-lane side track
- Demolition of existing bridge structure
- Minor channel works
- Culvert Installation
- Construction of pavement over culvert
- Reinstatement of road pavement at approaches
- Road signage and other road furniture

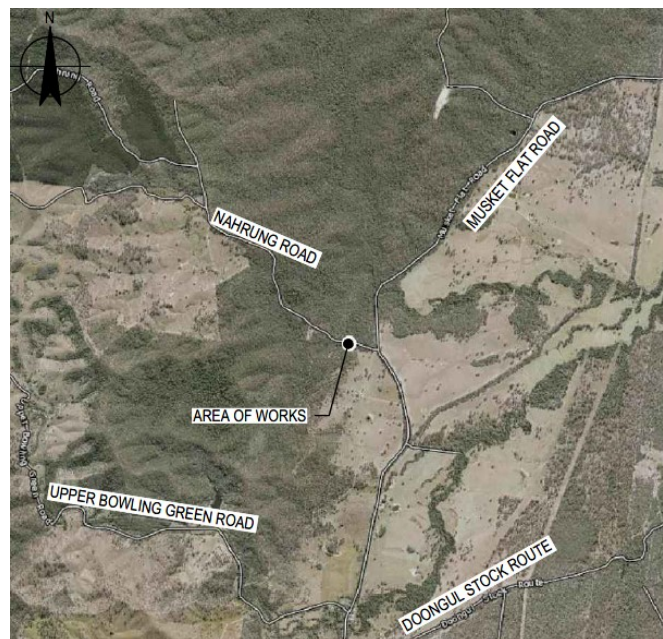

The traffic management plan that will be put in place for the duration of the construction period will allow for the construction of a temporary one-lane side track.

INDICATIVE PROJECT MILESTONES

Feb 2021	Final Design
March/June 2021	Construction Period
June 2021	Project Completion

Note: Project milestones are subject to weather and may change.

Nahrung Road, North Aramara—Bridge Replacement

