

Kerb and Channel Replacement—Queen Street (Fort Lane to John Street)

PROJECT:

This project provides for the replacement of approximately 80m of kerb and channel on the northern side of Queen Street between Fort Lane and John Street.

The kerb and channel replacement works are being undertaken as a result of inspections carried out as part of Council's ongoing asset inspection program which identified that the kerb and channel was showing signs of failure and distress.

PROJECT ESTIMATE:

\$94,500

PROJECT SCOPE OF WORKS:

The Project scope is as follows:

- Excavation and earthworks;
- Concrete kerb and channel works;
- Replacement of residential driveway at 85 and 87 Queen Street (reinstatement works to be completed in plain concrete only);
- Subsoil drainage and new road gully units;
- Asphalt resurfacing;
- Topdressing and turfing of disturbed areas




The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

INDICATIVE PROJECT MILESTONES

Sept 2021	Final Design
Sept/Oct 2021	Tender Period
Nov 2021	Construction Period
Dec 2021	Project Completion

Note: Project milestones are subject to contract and weather and may change.

Kerb and Channel Replacement Queen Street (Fort Lane to John Street)

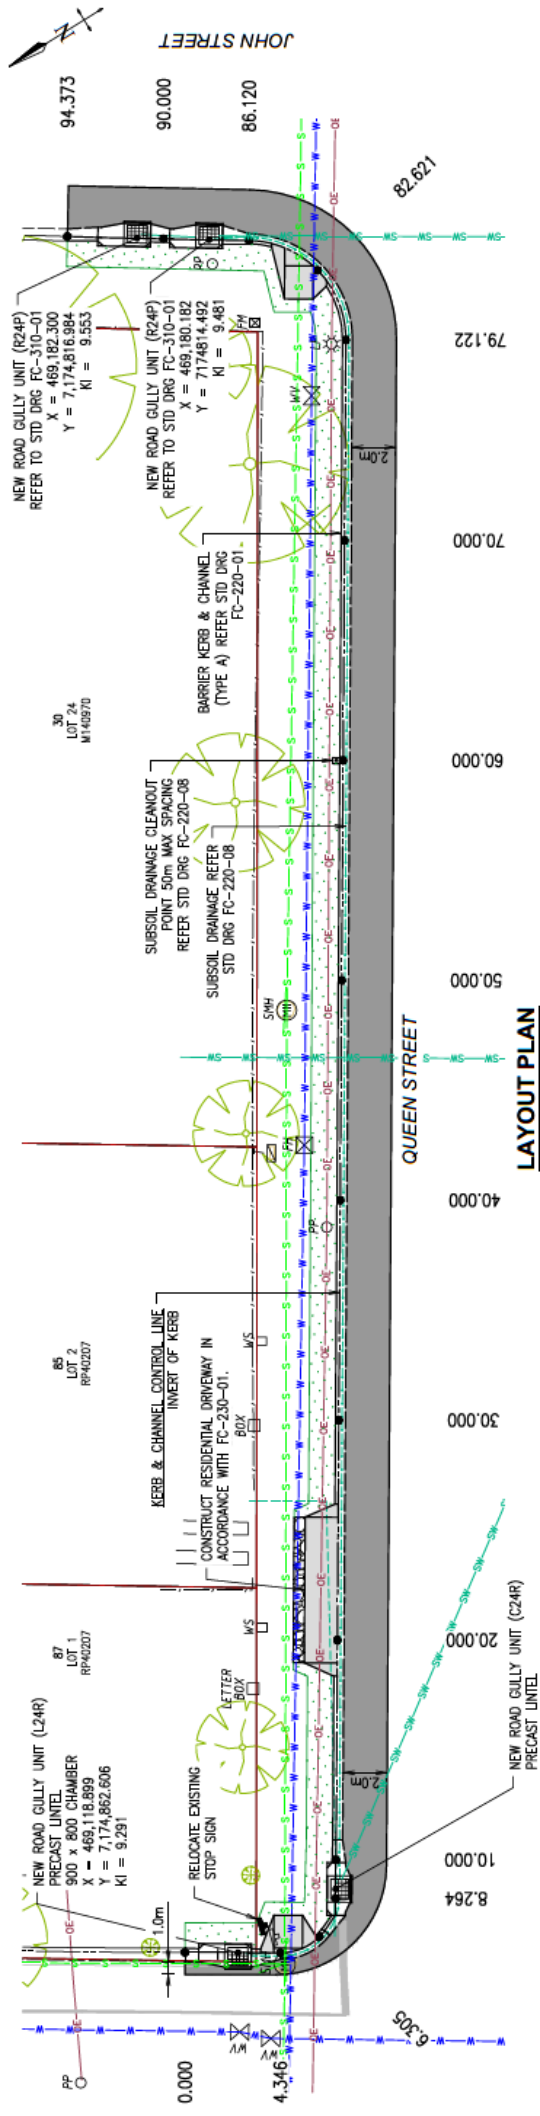

LEGEND	
	REINSTATE GRAVEL
	NEW TURF
	NEW CONCRETE DRIVEWAY (125mm THICK SL62 MESH)
	NEW ASPHALT SEAL (AC10M A15E)