

## Sydney Street and Ariadne Street Road and Footpath Works

### PROJECT:

This project provides for the construction of a one way road from the existing end of Sydney Street along the unformed section of Ariadne Street to Victory Street, formalisation of existing infrastructure in Sydney Street and the construction of a 2.5m wide concrete shared path from Victory Street along the western side of Ariadne Street and the northern side of Sydney Street to match to the existing path in Saltwater Creek Road.


### PROJECT ESTIMATE:

\$2.5M (This project will be delivered with funding of \$1.7M from the Queensland Government's Works for Queensland Funding Program with remaining funds from Council's Capital Budget)

### PROJECT SCOPE OF WORKS:

The Project scope is as follows:

- Construction of a one-way road (traffic to travel in a southerly direction) from the existing end of Sydney Street along the unformed section of Ariadne Street to Victory Street;
- Installation of 4 x speed humps along the newly constructed area of Ariadne Street;
- Formalisation of existing turn around area at end of Sydney Street;
- Construction of 2.5m wide concrete shared path from Victory Street along the western side of Ariadne Street and the northern side of Sydney Street to match to existing path in Saltwater Creek Road;
- Upgrade of culverts at end of Sydney Street;
- Installation of pedestrian refuge islands in Victory Street to allow for a safe pedestrian access point across Victory Street;
- 3 x new driveway crossovers at 166-168 Sydney Street (*reinstatement works to be completed in plain concrete only*);
- Removal of trees, gardens and vegetation between the two driveway areas at 166-168 Sydney Street;

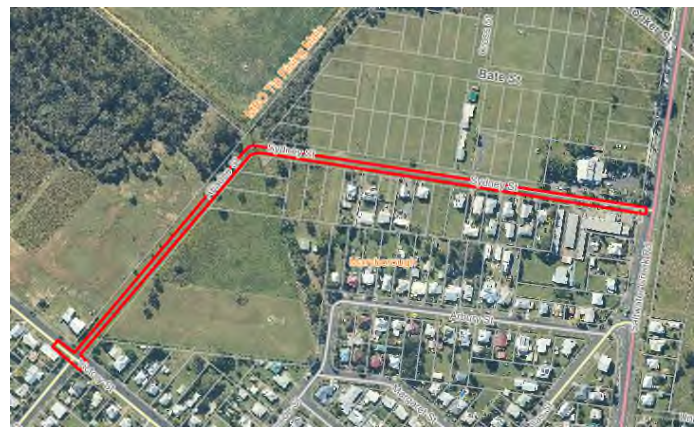

### PROJECT SCOPE OF WORKS (CONTD):

- Relocation of existing power pole situated adjacent to 166-168 Sydney Street;
- Entrance to Sydney Street to be narrowed to a width of 10.2m to allow for footpath construction;
- Street Lighting;
- Linemarking;
- Restoration Works.

The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

### INDICATIVE PROJECT MILESTONES

July 2022	Final Design
Aug/Oct 2022	Tender Period
March/July 2023	Construction Period
Aug 2023	Project Completion

Note: Project milestones are subject to contract and weather and may change.

# Sydney Street and Ariadne Street Road and Footpath Works

