

Footpath Construction – Pallas Street (Woodstock Street to Arbury Street)

PROJECT:

This project provides for the construction of a 2m concrete footpath on the northern side of Pallas Street between Woodstock Street and Arbury Street.

The footpath works will complete a missing link in this location.

PROJECT ESTIMATE:


\$650,000

PROJECT SCOPE OF WORKS:

The project scope is as follows:

- Excavation and earthworks;
- Construction of a 2m concrete footpath on the northern side of Pallas Street between Woodstock Street and Arbury Street;
- 10 x new kerb ramps;
- Re-construction of 24 x driveways at 238, 242, 244, 246, 248, 252, 254, 256, 258, 260, 262, 264, 266, 282, 284, 286, 288, 292, 294, 300, 310, 312, 320 and 322 Pallas Street. *(Note: reinstatement works to be completed in plain concrete only);*
- Removal of 18 footpath trees in front of properties situated at 238, 246x2, 250, 264x4, 266x2, 268, 272, 274, 280, 294, 302 and 308x2 Pallas Street;
- Topdressing and turfing of disturbed areas.

The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

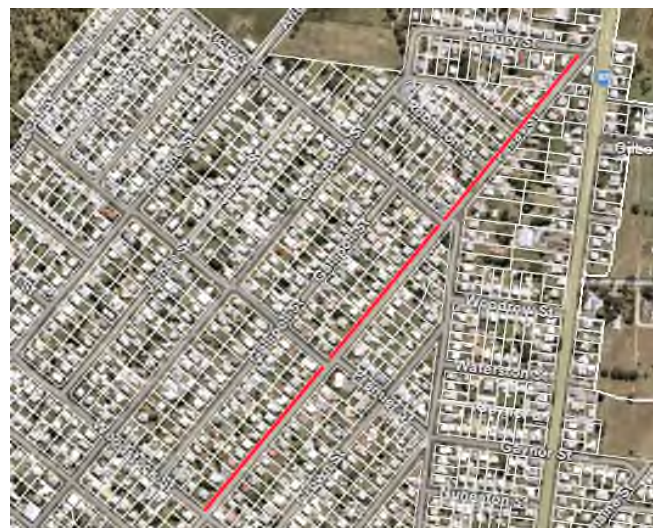


INDICATIVE PROJECT MILESTONES

June 2025	Final Design
July 2025	Tender Period
Aug/Nov 2025	Construction Period
Dec 2025	Project Completion

Note: Project milestones are subject to contract and weather and may change.

Footpath Construction – Pallas Street (Woodstock St to Arbury St)

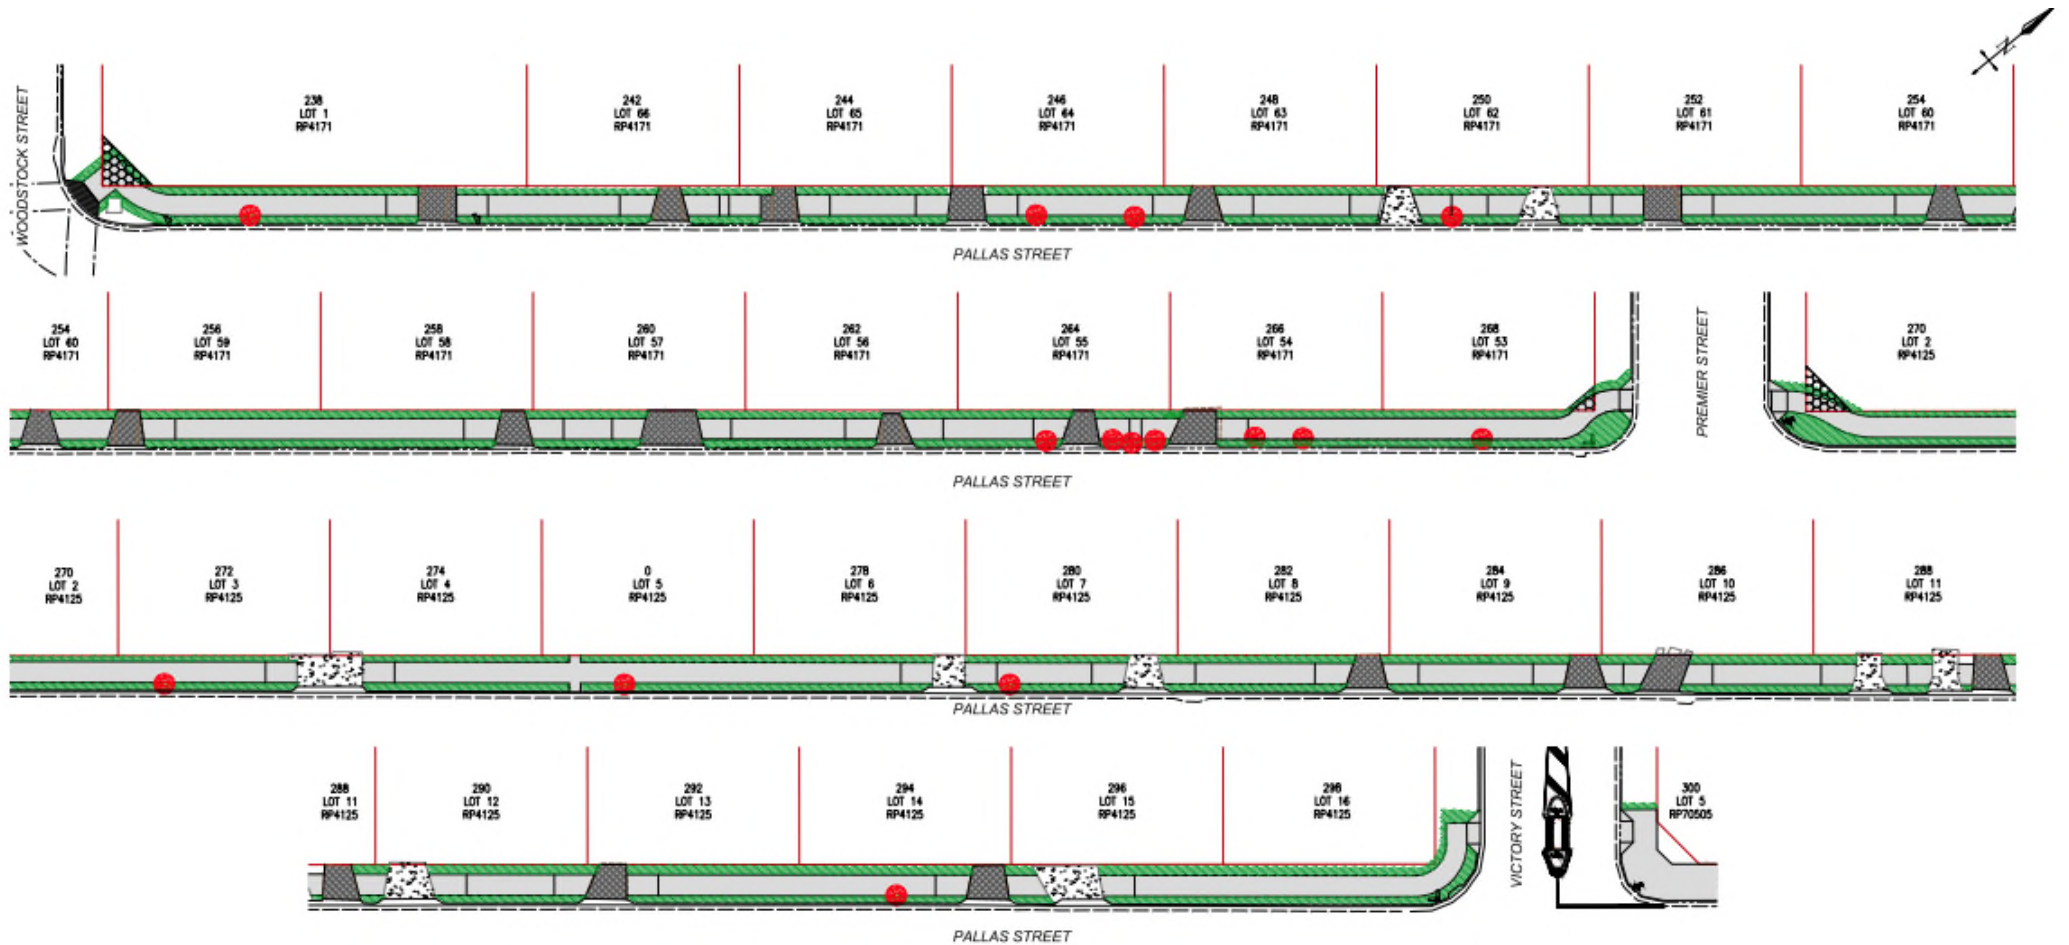

Footpath Construction – Pallas Street (Woodstock St to Arbury St)

