

Construction of Formalised Carpark Areas and New Footpath – Banana St (Gick St to end of Banana St)

PROJECT:

This project provides for the following:

1. Construction of formalised carparking areas in Banana Street adjacent to the Federation Park Football grounds;
2. Construction of a 2m concrete footpath on both sides of Banana Street from Cardigan Street to the end of Banana Street;
3. Construction of a 2m concrete footpath on the southern side of Banana Street between Gick Street and Cardigan Street.

These projects were identified for completion to assist with the formalisation of parking areas in and around the Federation Park Football Grounds and as part of Council's Active Travel Strategy.


PROJECT ESTIMATE:

\$1.766M (this project is partly funded through the State Government's Works for Queensland Funding Program)

PROJECT SCOPE OF WORKS:

The project scope is as follows:

- Excavation and earthworks;
- Construction of formalised car parking areas on both sides of Banana Street from Cardigan Street to the end of Banana Street;
- Construction of a 2m concrete footpath on both sides of Banana Street from Cardigan Street to the end of Banana Street to provide linkages to the formalised carparking areas adjacent to the Federation Park Football Club;
- Stormwater drainage works;
- Construction of a 2m concrete footpath on the southern side of Banana Street between Gick Street and Cardigan Street;

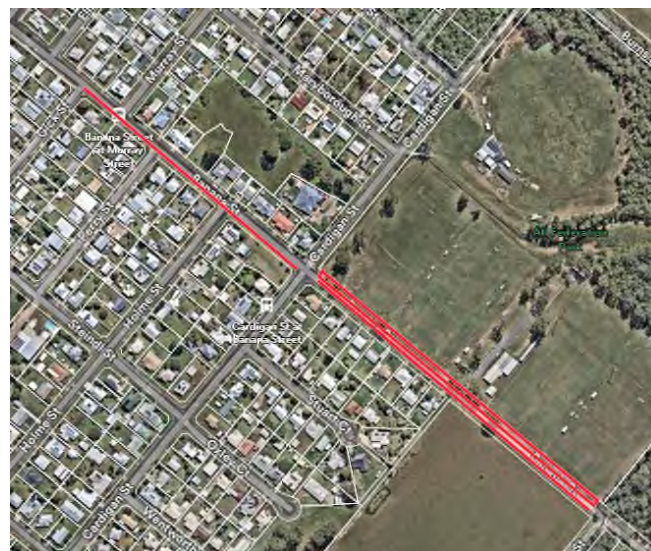

PROJECT SCOPE OF WORKS (CONTD):

- 7 x new kerb ramps;
- Re-construction of 10 x driveways at 141, 143, 145, 147, 149, 151, 153, 155x2 and 157 Banana Street. (Note: reinstatement works to be completed in plain concrete only);
- Topdressing and turfing of disturbed areas.

The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

INDICATIVE PROJECT MILESTONES	
May 2025	Final Design
June 2025	Tender Period
Sept 25/Jan 26	Construction Period
Feb 2026	Project Completion

Note: Project milestones are subject to contract and weather and may change.

Construction of Formalised Carpark Areas and New Footpath – Banana Street (Gick St to end of Banana St)

