

Footpath Construction – Walker Street (Russell Street to Jupiter Street)

PROJECT:

This project provides for the construction of a 1.8m wide concrete footpath for a distance of approximately 190m on the southern side of Walker Street between Russell Street and Jupiter Street.

The footpath works will complete the missing link in this location.

PROJECT ESTIMATE:

\$240,000

PROJECT SCOPE OF WORKS:

The project scope is as follows:

- Excavation and earthworks;
- Construction of a 1.8m wide concrete footpath for a distance of approximately 190m on the southern side of Walker Street between Russell Street and Jupiter Street;
- Reconstruction of 3 existing driveways/vehicle crossovers at 252, 250 and 248 Walker Street. *(Note: reinstatement works to be completed in plain concrete only);*
- Construction of a pedestrian refuge in Jupiter Street at its intersection with Walker Street;
- 4 x new kerb ramps;
- The re-construction of areas of kerb and channel;
- The installation of areas of yellow line marking;
- Signage relocation and installation;
- Topdressing and turfing of disturbed areas.



The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

INDICATIVE PROJECT MILESTONES	
October 2025	Final Design
Jan/Feb 26	Tender Period
May/June 2026	Construction Period
July 2026	Project Completion

Note: Project milestones are subject to contract and weather and may change.

Footpath Construction – Walker Street (Russell Street to Jupiter Street)




LAYOUT PLAN



LAYOUT PLAN

LEGEND	
	PROPOSED CONCRETE
	PROPOSED AREA OF TURF
	PROPOSED PATHWAY TIES
	PROPOSED PAVEMENT SURFACING
	PROPOSED CONCRETE
	PROPOSED CONTROL LINE
	PROPOSED KERB AND CHANNEL
	EXISTING PAVEMENT SURFACING

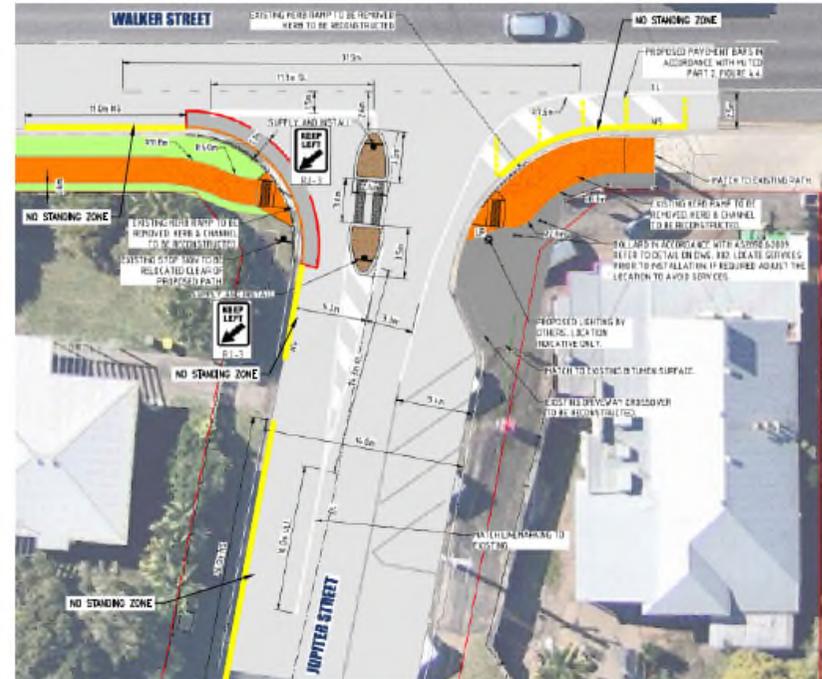

INTERSECTION DETAILS



FRASER COAST REGIONAL COUNCIL
WALKER STREET (RUSSELL ST TO JUPITER ST)
1.8m WIDE CONCRETE FOOTPATH