

Pavement Reconstruction - Sager Ct from Colyton St to End and Trevnielsen Ct from Sager Ct to End

PROJECT:

This project provides for pavement reconstruction works in Sager Court from Colyton Street to end and Trevnielsen Court from Sager Court to End.

The pavement reconstruction works are being undertaken as a result of Council's ongoing asset inspection program which identified that the road was showing signs of pavement failure and distress.

PROJECT ESTIMATE:

\$1.15M (This project is proudly funded by the Australian Government in partnership with the Fraser Coast Regional Council)

PROJECT SCOPE OF WORKS:

The project scope is as follows:

- Excavation and earthworks;
- Pavement reconstruction works in Sager Court from Colyton Street to end and Trevnielsen Court from Sager Court to End;
- Sectional replacement of approximately 250m of kerb and channel;
- Reconstruction of 10 existing vehicle crossovers at 6, 7x2, 8x2, 10, 14, 16 and 18 Sager Court and 2 Trevnielsen Court (*Note: reinstatement works to be completed in plain concrete only*);
- Replacement of one (1) kerb ramp;
- Replacement of three (3) road gully units;
- Topdressing and turfing of disturbed areas.



The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.


INDICATIVE PROJECT MILESTONES

June 2026	Final Design
July/Oct 2026	Construction Period
November 2026	Project Completion

Note: Project milestones are subject to weather and may change.



Pavement Reconstruction - Sager Ct from Colyton St to End and Trevnielsen Ct from Sager Ct to End

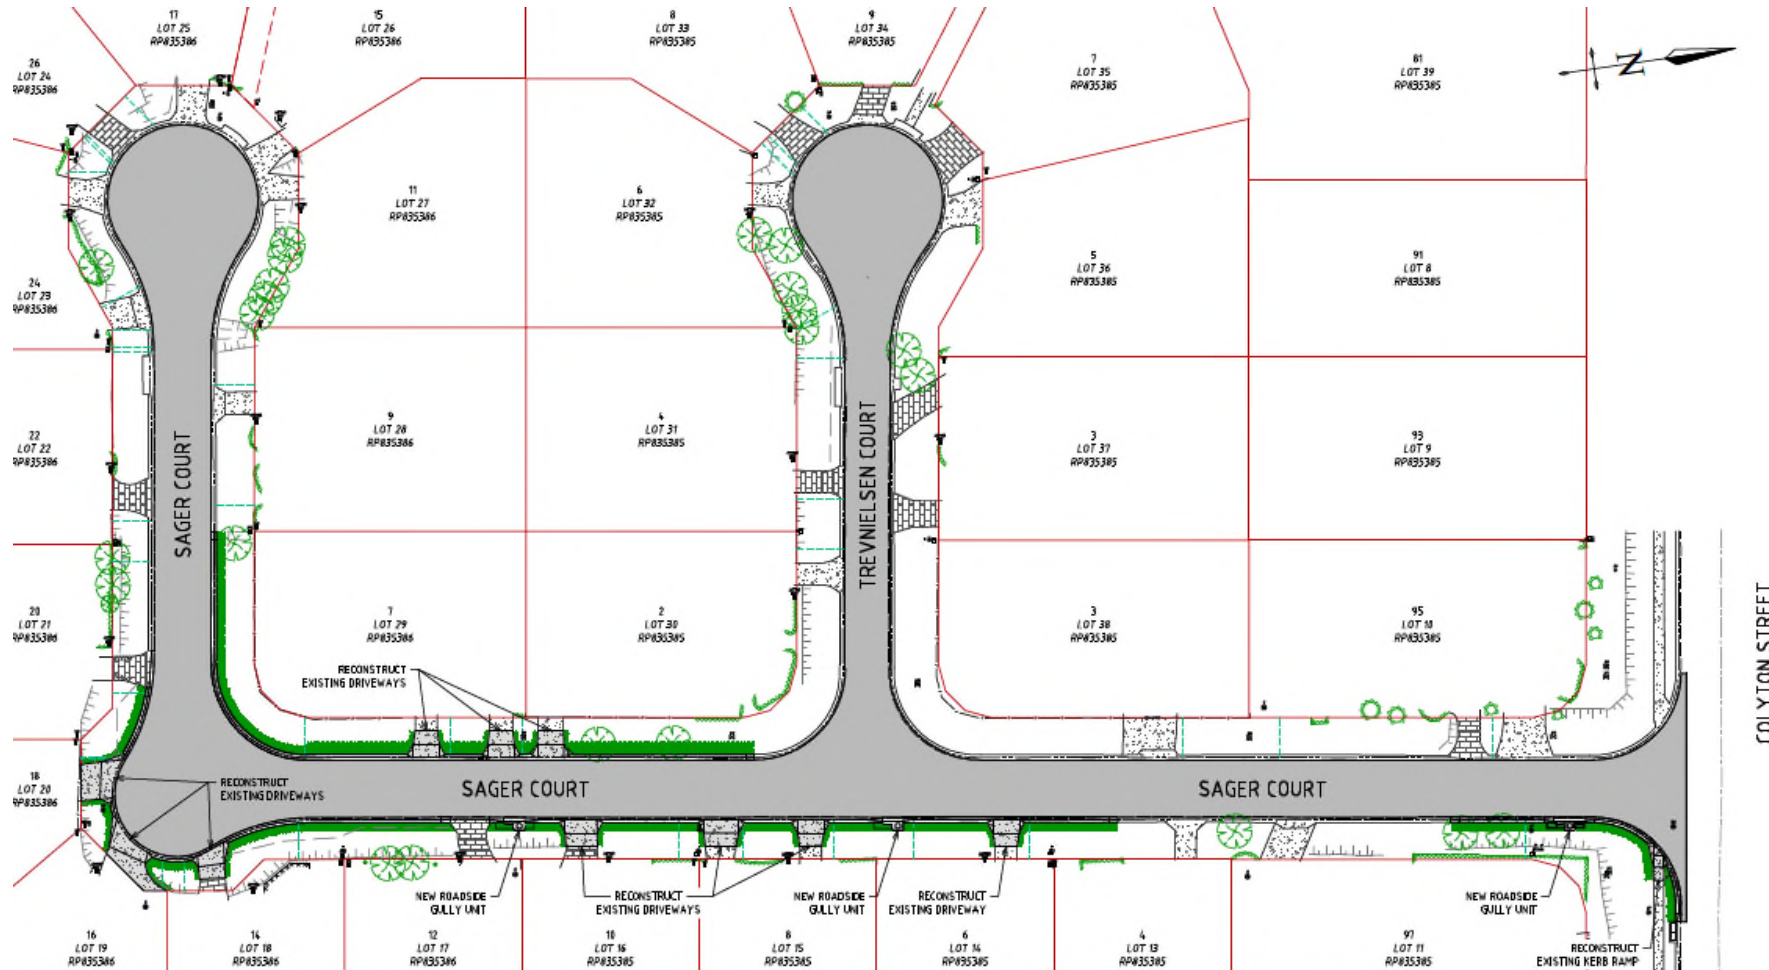

LEGEND:

EXISTING CONCRETE		NEW CONCRETE		NEW KERB & CHANNEL	
EXISTING PAVERS		NEW PAVEMENT		TOP DRESS & TURF ALL DISTURBED AREAS	