Fraser Coast REGIONAL COUNCIL
Building better communities together.

FACT SHEET

Road Reconstruction – Wilson Street (Pallas Street to Tooley Street)

PROJECT:

This project provides for narrowing and road reconstruction works in Wilson Street between Pallas Street and Tooley Street, including transitions to the existing side streets of Woodrow Street, Waterston Street, Crown Street, Gaynor Lane, Gaynor Street, Premier Street and Tooley Street.

The road reconstruction works are being undertaken as a result of Council's ongoing asset inspection program which identified that the road was showing signs of pavement failure and distress.

PROJECT ESTIMATE:

$3M

PROJECT SCOPE OF WORKS:

The project scope is as follows:

- Excavation of existing surfacing and pavement;
- Earthworks;
- Narrowing of Wilson Street between Pallas Street and Tooley Street including transitions to the existing side streets of Woodrow Street, Waterston Street, Crown Street, Gaynor Lane, Gaynor Street, Premier Street and Tooley Street;
- Replacement of kerb and channel, both sides;
- Reconstruction of existing vehicle crossovers and sections of driveways at 36, 42, 43, 45, 46, 57, 59, 73, 75 Wilson Street, 50 Crown Street and 1 Premier Street;
- Reconstruction of existing vehicle crossovers and sections of gravel driveways at 44, 53, 55, 67 Wilson Street and 48 Crown Street;
- Reconstruction of existing vehicle crossovers and sections of concrete driveway tracks at 40, 41, 47, 65 and 69x2 Wilson Street;
- Reconstruction of existing vehicle crossover and sections of gravel and concrete driveway at 71 Wilson Street;



PROJECT SCOPE OF WORKS (CONTD):

- Reconstruction of existing vehicle crossovers only at 291 and 293 Pallas Street;

  NOTE: any vehicle crossover or driveway reinstatement works where concrete is required will be completed in plain concrete only

- New infill traffic island;
- New road gully units and stormwater chambers and manholes;
- Replacement of existing stormwater lines;
- Linemarking, topdressing and turfing of disturbed areas.


The traffic management plan that will be put in place for the construction period will allow for a full road closure of Wilson Street, local traffic only permitted.


INDICATIVE PROJECT MILESTONES	
October 2026	Final Design
Nov 26/May 27	Construction Period
June 2027	Project Completion


Note: Project milestones are subject to weather and may change.

INFRASTRUCTURE SERVICES
PHONE: 1300 79 49 29
WEB: frasercoast.qld.gov.au
EMAIL: enquiry@frasercoast.qld.gov.au

Road Reconstruction – Wilson Street (Pallas Street to Tooley Street)

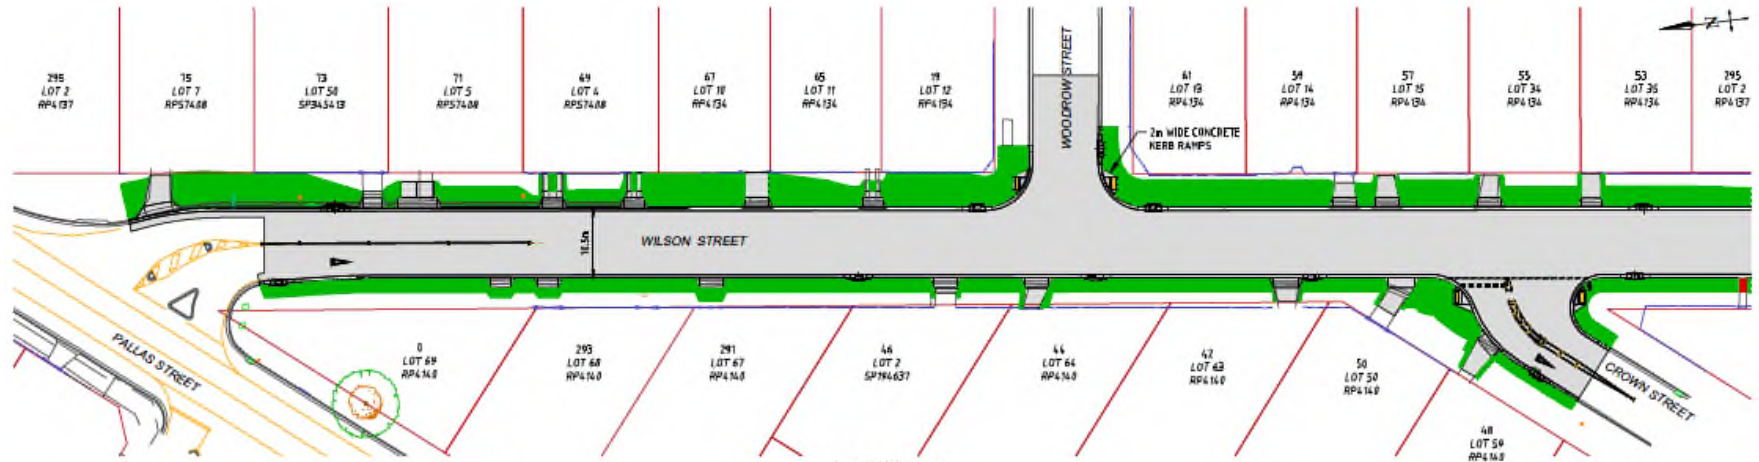

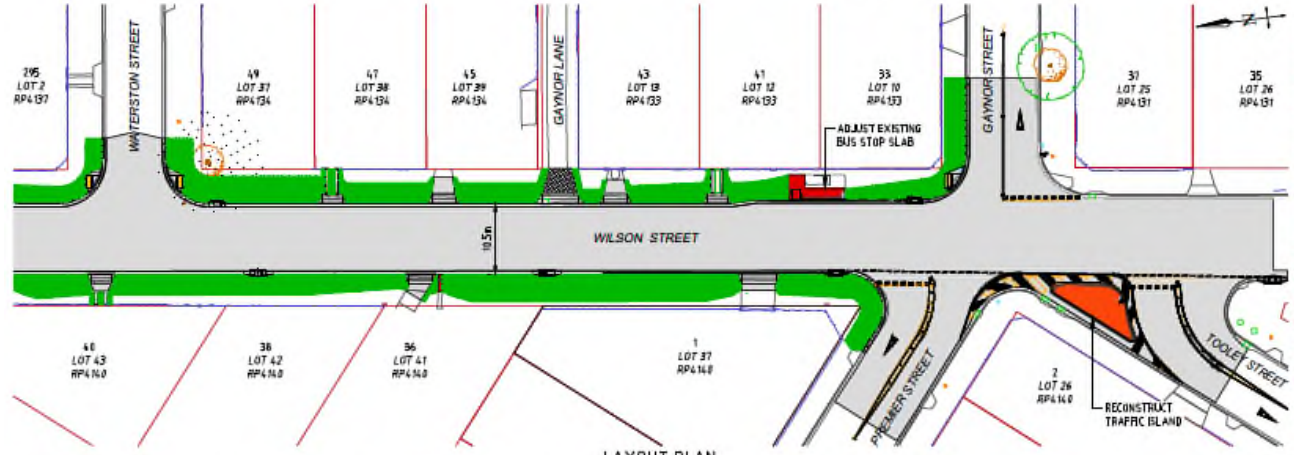

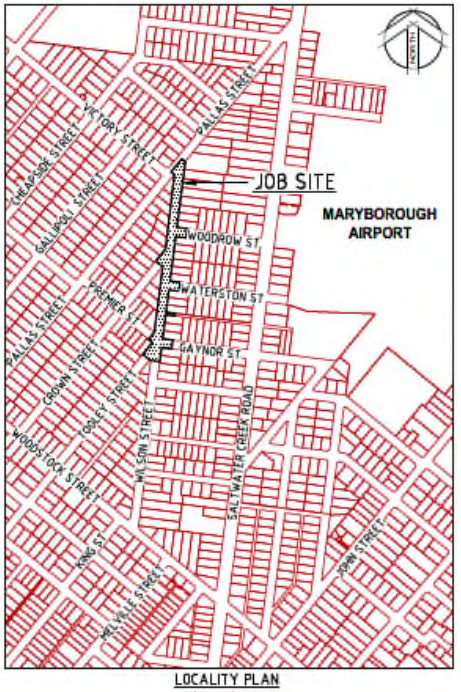

PROPOSED WORKS WILL INCLUDE:
RECONSTRUCTION OF THE ROAD PAVEMENT, KERB & CHANNEL, DRIVEWAY CROSSOVERS, PEDESTRIAN KERB RAMPS, AND TRAFFIC ISLAND AND THE ADJUST OF THE BUS STOP SLAB.
SOME EXISTING STORMWATER PIPES WILL BE REPLACE AND NEW INLET PITS INSTALLED. THE UPGRADE OF LINE MARKING AND SIGNAGE.

LEGEND – NEW WORKS

- NEW KERB AND CHANNEL
- NEW TOPSOIL AND TURFING
- NEW CONCRETE FOOTPATH
- NEW STENCIL-CRETE FINISH TO TRAFFIC ISLANDS
- NEW PAVEMENT
- NEW PLAIN CONCRETE RESIDENTIAL DRIVEWAY SLAB
- NEW PLAIN CONCRETE COMMERCIAL DRIVEWAY SLAB
- NEW PLAIN CONCRETE DRIVEWAY TRACKS
- NEW GRAVEL DRIVEWAY
- NEW RESIDENTIAL CROSSOVER
- NEW 2m WIDE KERB RAMP WITH YELLOW TGSI's
- NEW RCU ROAD GULLY UNIT

FRASER COAST REGIONAL COUNCIL
WILSON STREET, MARYBOROUGH.
PALLAS ST TO GAYNOR ST.
ROAD RECONSTRUCTION.