

**Date:** 13/07/2020 **Author:** Selwyn Pohoiwi **OP242 Project:** Main Street Construction Stage 3C  
**Rev #:** 1 **MUTCD Release Date:** 29th NOVEMBER 2019 **MUTCD Figure:** 5-1.4B  
**TGS:** SGQ-MAIN STREET 1001 -2020 **Stage:** ONE OF FOUR

**Comments:**

**NOTES:**

- 1 - Works to include Roundabout Construction & Associated Roadworks
- 2 - Any Conflicting Signage must be covered
- 3 - Local access shall be considered
- 4 - Monitor and adjust traffic flow as required any changes to be risk assessed and noted at Daily Prestart
- 5 - If Traffic Queues risk access and place Queued Traffic signage
- 6 - Delays to be 15min Max
- 7 - Lights may be turned To Manual during Peak Times for less disruptions if required.
- 8 - Stop Signs on Chapel & Maggs Hill Road to be covered.
- 9 - Advisory Signage in place



Posted Speed

Table 4.2 – Value of dimension D

Selected	Speed limit* (km/h)	Dimension D (m)
	40 or less	5 to 10
	50	10 to 15
✓	60	15 to 45
	70, 80	60 to 80
	90, 100	80 to 100
	110	100 to 120

NOTE: The permanent Posted Speed Limit on the section of road subject to roadwork before commencement of roadworks.

**Legend**


Work Area

**AFTER HOURS NOTES**

\*Cones Or Bollards to be moved to the kerb if required

\*Barricading around hazardous areas

\*Close Workman Signage and leave speed displayed

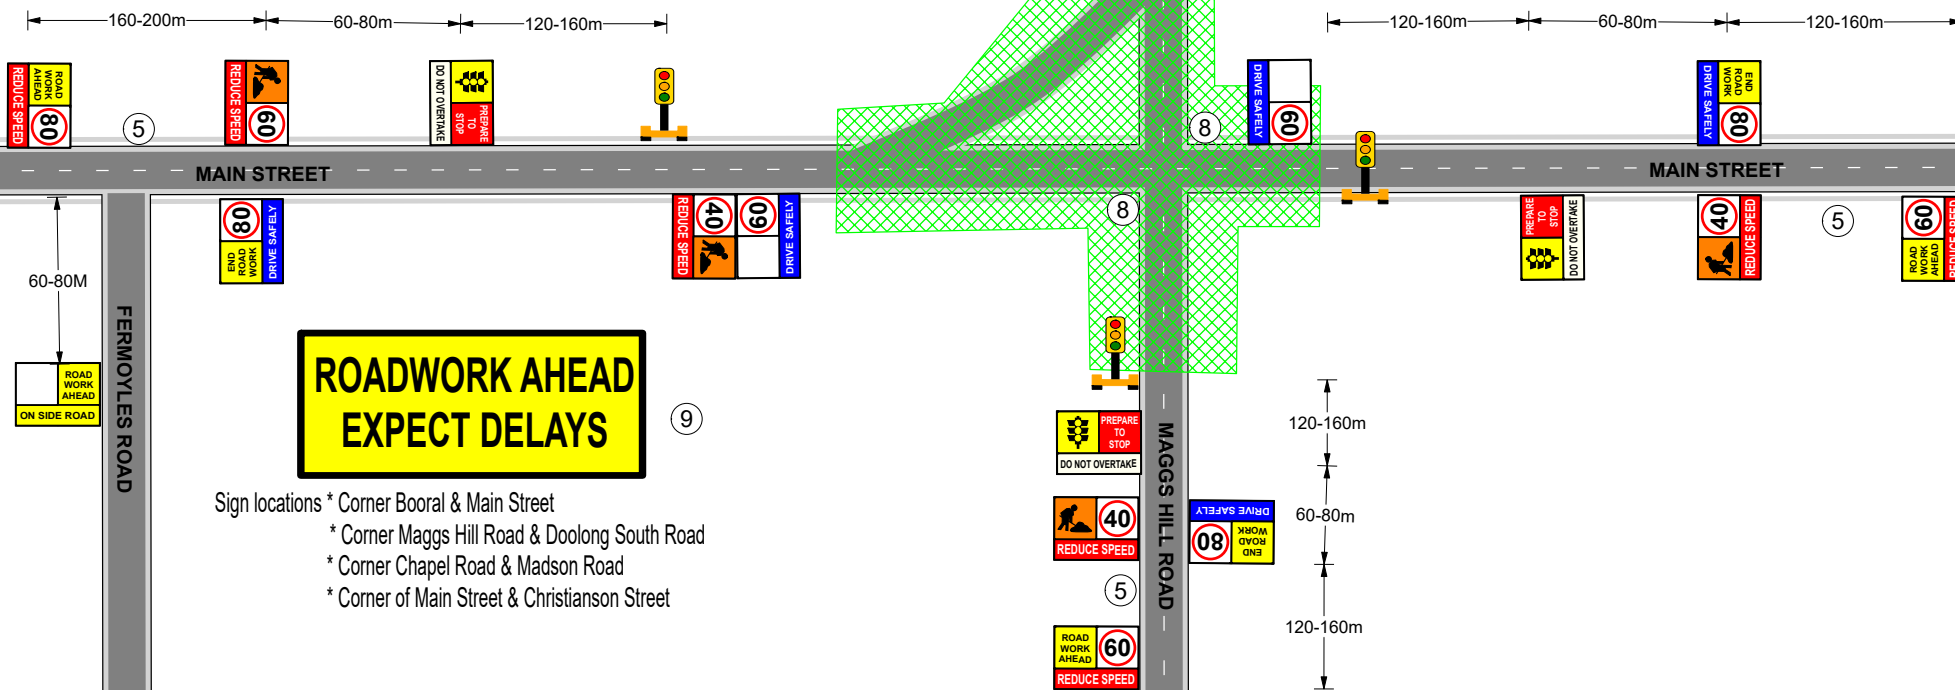

**ROADWORK AHEAD  
EXPECT DELAYS**

- Sign locations \*
- \* Corner Booral & Main Street
  - \* Corner Maggs Hill Road & Doolong South Road
  - \* Corner Chapel Road & Madson Road
  - \* Corner of Main Street & Christianson Street