

Date: 30/10/2020 Author: Selwyn Pohoiwi OP242 Project: Main Street Construction Stage 3C  
 Rev #: 1 MUTCD Release Date: 29th NOVEMBER 2019 MUTCD Figure: 5-1.4B & 5-1.27  
 TGS: SGQ-MAIN STREET 1004B -2020 Stage: TWO OF FOUR

**Comments:**

**NOTES:**

- 1 - Works to include Roundabout Construction & Associated Roadworks
- 2 - Any Conflicting Signage shall be covered as per MUTCD Part 3 Nov 2019.
- 3 - Local access shall be considered.
- 4 - Monitor and adjust traffic flow as required any changes to be risk assessed and noted at Daily Prestart.
- 5 - If Traffic Queues exceed reasonable lengths, Queued Traffic Signage shall be implemented.
- 6 - Delays shall be kept to a Maximum of 15min.
- 7 - Lights may be turned To Manual Operation during Peak Traffic Periods for less disruptions if required.
- 8 - Stop Signs on Chapel & Maggs Hill Road shall be covered.
- 9 - Advisory Signage in place.
- 10 - Detour Signage in place on Main Street for side track.



**AFTER HOURS NOTES**



- \*Cones Or Bollards to be moved to the kerb if required
- \*Barricading around hazardous areas
- \*Close Workman Signage and leave speed displayed



**Posted Speed**



**Table 4.2 – Value of dimension D**

Selected	Speed limit' (km/h)	Dimension D (m)
	40 or less	5 to 10
	50	10 to 15
✓	60	15 to 45
	70, 80	60 to 80
	90, 100	80 to 100
	110	100 to 120

**NOTE:** The permanent Posted Speed Limit on the section of road subject to roadwork before commencement of roadworks.


**Legend**



700mm Cones Or T-Top Bollards



Work Area

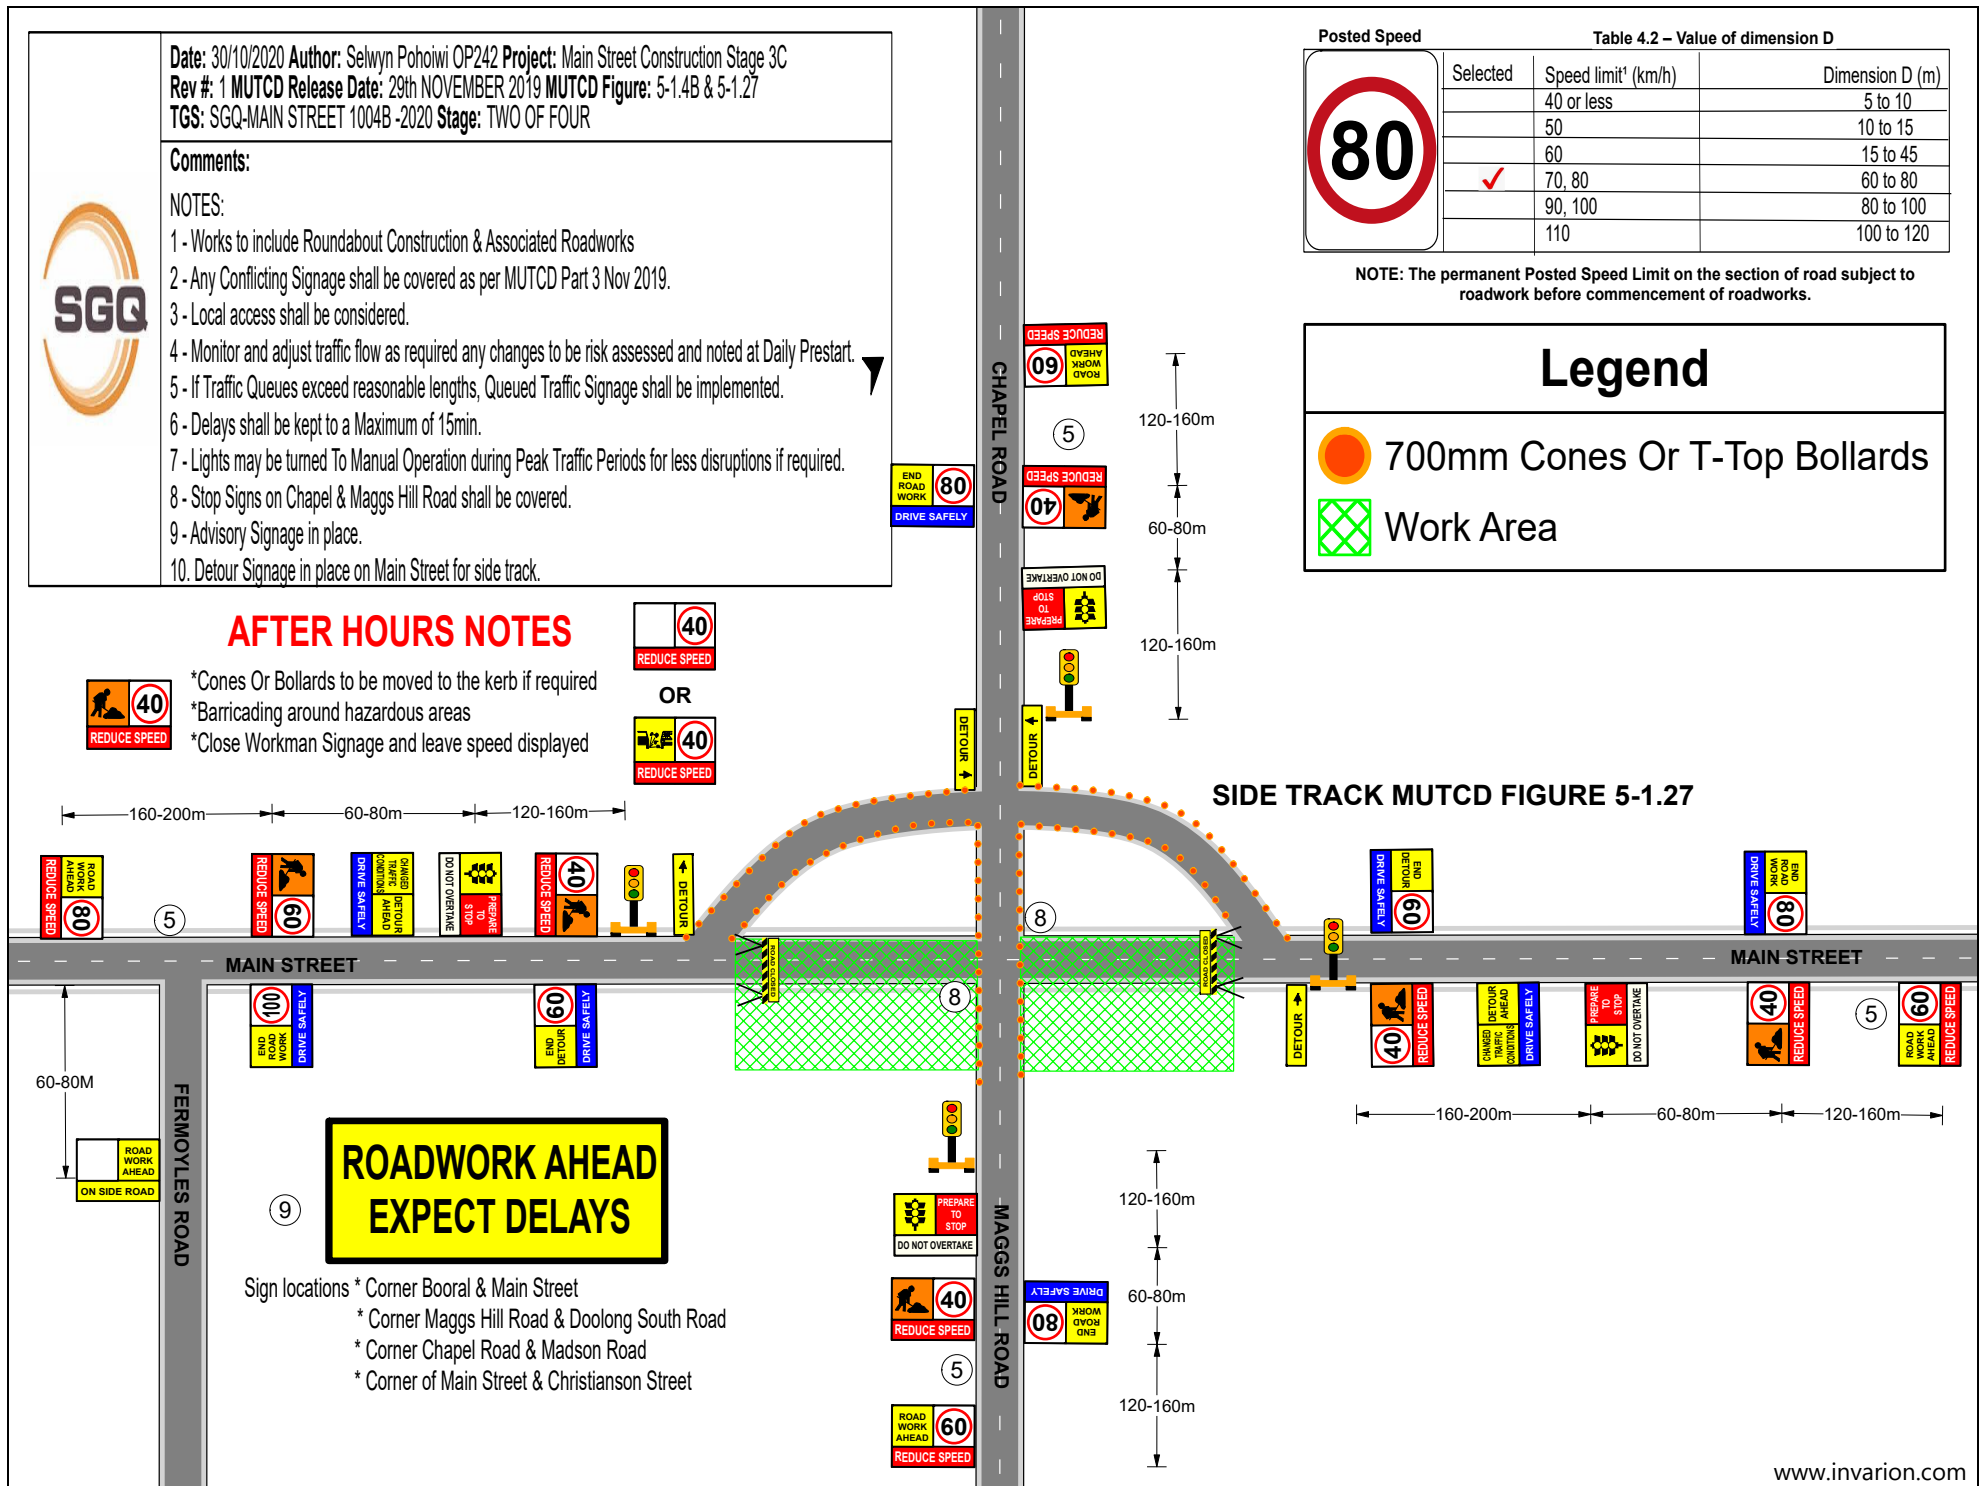

- Sign locations
- \* Corner Booral & Main Street
  - \* Corner Maggs Hill Road & Doolong South Road
  - \* Corner Chapel Road & Madson Road
  - \* Corner of Main Street & Christianson Street